



COMMERCIAL FRESH AIR VENTILATOR

商用新风换气机



COMMERCIAL FRESH AIR VENTILATOR
商用新风换气机

PRODUCT FEATURES

产品特点

Energy-saving: The use of cross-counterflow plate heat exchange improves energy recovery rate, reduces air resistance, and achieves more obvious energy-saving effect.

More specifications: Suitable for residences, meeting rooms, laboratories, office computer rooms.

节能：交叉逆流板式热交换的使用，提高能量回收率，降低空气阻力，节能效果更加明显。

规格更多：适用于住宅、会议室、实验室、办公室机房

SPECIFICATIONS TABLE 1

规格表 1

Model 型号		Power Supply 电源		Fresh Air Volume 新风量		Cooling Capacity 制冷		Heating Capacity 制热		Noise 噪音		Weight 重量	
		High 高	Medium 中	Low 低	High 高	Medium 中	Low 低	High 高	Medium 中	Low 低	High 高	Low 低	
RNXHBQ-D1.5TF	220V50Hz	150	100	80	—	—	—	—	—	—	44	22	35
RNXHBQ-D2.5TF	220V50Hz	250	200	165	—	—	—	—	—	—	46	22	39
RNXHBQ-D3.5TF	220V50Hz	350	300	200	—	—	—	—	—	—	49	25	40
RNXHBQ-D5TF	220V50Hz	500	400	300	—	—	—	—	—	—	51	25	43
RNXHBQ-D6TF	220V50Hz	600	500	400	—	—	—	—	—	—	54	30	64
RNXHBQ-D8TF	220V50Hz	800	650	500	—	—	—	—	—	—	56	32	71
RNXHBQ-D10TF	220V50Hz	1000	800	600	—	—	—	—	—	—	56	31	83

DIMENSION PARAMETERS TABLE 1

尺寸参数表 1

Model 型号	L	L1	W	W1	W2	H	H1	C
RNXHBQ-D1.5TF	860	810	660	710	345	88	70	Φ
RNXHBQ-D2.5TF	860	810	660	10	315	88	70	Φ
RNXHBQ-D3.5TF	860	810	660	710	315	88	70	Φ
RNXHBQ-D5TF	900	850	750	800	350	110	70	Φ
RNXHBQ-D6TF	900	850	750	800	350	110	70	Φ
RNXHBQ-D8TF	1100	930	820	870	400	138	70	Φ
RNXHBQ-D10TF	1195	1045	870	920	425	148	70	—


DIMENSION PARAMETERS TABLE 2

尺寸参数表 2


Model 型号	Filtration 过滤	Air Volume (m³/h) 风量 (m³/h)	Static Pressure (Pa) 静压 (Pa)	Air Inlet (mm) 风口 (mm)	Power (W) 功率 (W)	Dimensions (mm) 尺寸 (mm)
RNXJS-200DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	2000	200	350x300	740	1400x1200x530
RNXJS-250DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	2500	210	350x300	1100	1450x1200x600
RNXJS-300DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	3000	260	350x300	1500	1500x1300x640
RNXJS-400DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	4000	260	400x300	2200	1600x1400x640
RNXJS-500DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	5000	300	450x300	3000	1700x1500x640
RNXJS-600DT	Primary Filtration + Activated Carbon + High-Efficiency Filtration 初效过滤 + 活性炭 + 高效过滤	6000	310	500x400	4400	1800x1600x640

DETAILED DIMENSION PARAMETERS TABLE

Model 型号	Rated Voltage 额定电压	Fresh Air Volume 新风量	Enthalpy Recovery Rate 焓回收率		Noise 噪音	Weight 重量
			Cooling 制冷	Heating 制热		
RNXHBQ-D15	380V	1500	66%	70%	52	120
RNXHBQ-L15	380V	1500	66%	70%	52	130
RNXHBX-D15	380V	1500	66%	70%	52	125
RNXHBX-L15	380V	1500	66%	70%	52	135
RNXHBQ-D20	380V	2000	62%	71%	56	120
RNXHBQ-L20	380V	2000	62%	71%	56	138
RNXHBX-D20	380V	2000	62%	71%	56	125
RNXHBX-L20	380V	2000	62%	71%	56	143
RNXHBQ-D25	380V	2500	61%	70%	60	160
RNXHBQ-L25	380V	2500	61%	70%	60	175
RNXHBX-D25	380V	2500	61%	70%	60	165
RNXHBX-L25	380V	2500	61%	70%	60	185
RNXHBQ-D30	380V	3000	60%	69%	61	165
RNXHBQ-L30	380V	3000	60%	69%	61	188
RNXHBX-D30	380V	3000	60%	69%	61	170

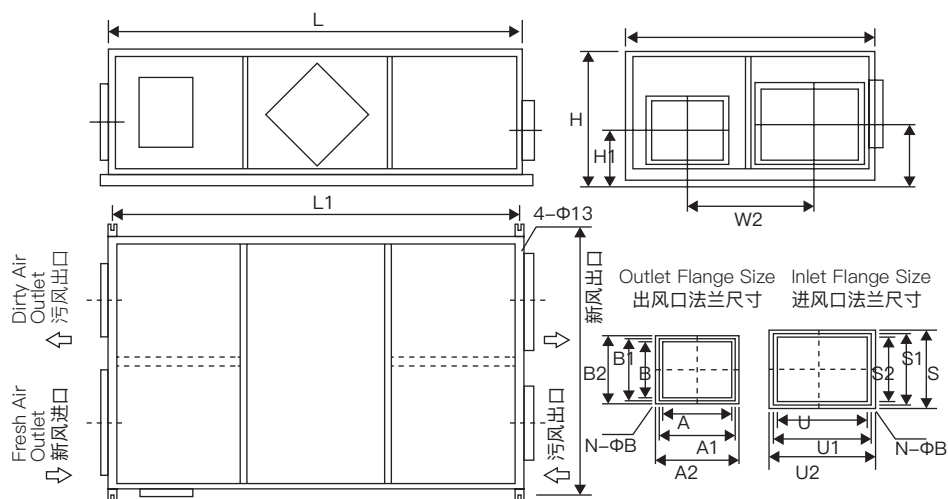


RNXHBQ-D15-D30 / RNXHBX-D15-D30

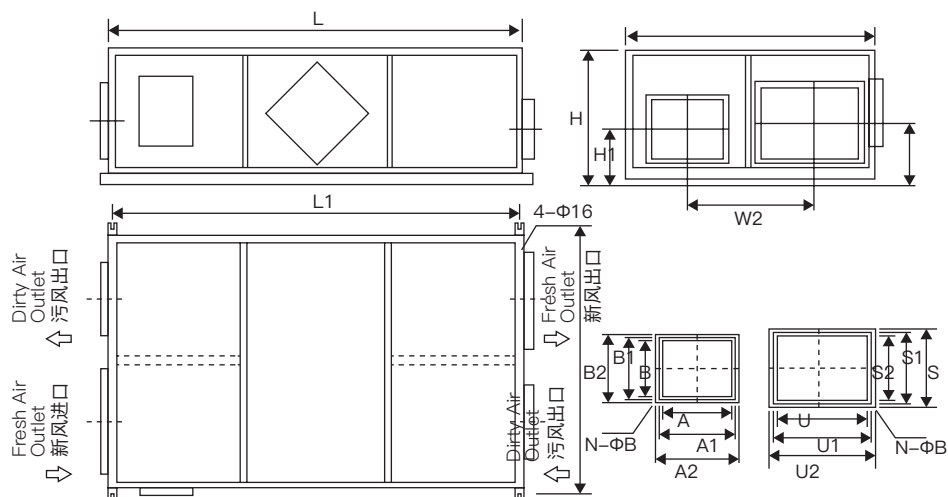

RNXHBQ-D40-D60 / RNXHBX-D40-D60

Model 型号	L	L1	W	W1	W2	H	H1	A	A1	A2	B	B1	B2	S	S1	S2	U	U1	U2	M	N
RNXHBQ-D15/ RNXHBX-D15	1215	1165	865	935	425	450	190	280	305	330	200	225	250	200	225	250	280	305	330	10	12
RNXHBQ-D20/ RNXHBX-D20	1280	1230	1030	1100	500	490	216	300	325	350	250	275	300	250	275	300	300	325	350	10	12
RNXHBQ-D25/ RNXHBX-D25	1280	1230	1130	1200	550	490	216	300	325	350	250	275	300	250	275	300	300	325	350	10	14
RNXHBQ-D30/ RNXHBX-D30	1425	1375	1230	1300	600	510	240	350	375	400	300	325	350	300	325	350	350	375	400	10	14
RNXHBQ-D40/ RNXHBX-D40	1475	1425	1230	1300	600	580	240	350	375	400	300	325	350	300	325	350	350	375	400	12	14
RNXHBQ-D50/ RNXHBX-D50	1725	1675	1525	1595	750	630	275	400	425	450	300	325	350	300	325	350	350	425	450	14	16
RNXHBQ-D60/ RNXHBX-D60	1825	1775	1525	1625	800	640	310	400	475	500	400	425	450	400	425	450	450	475	500	14	16

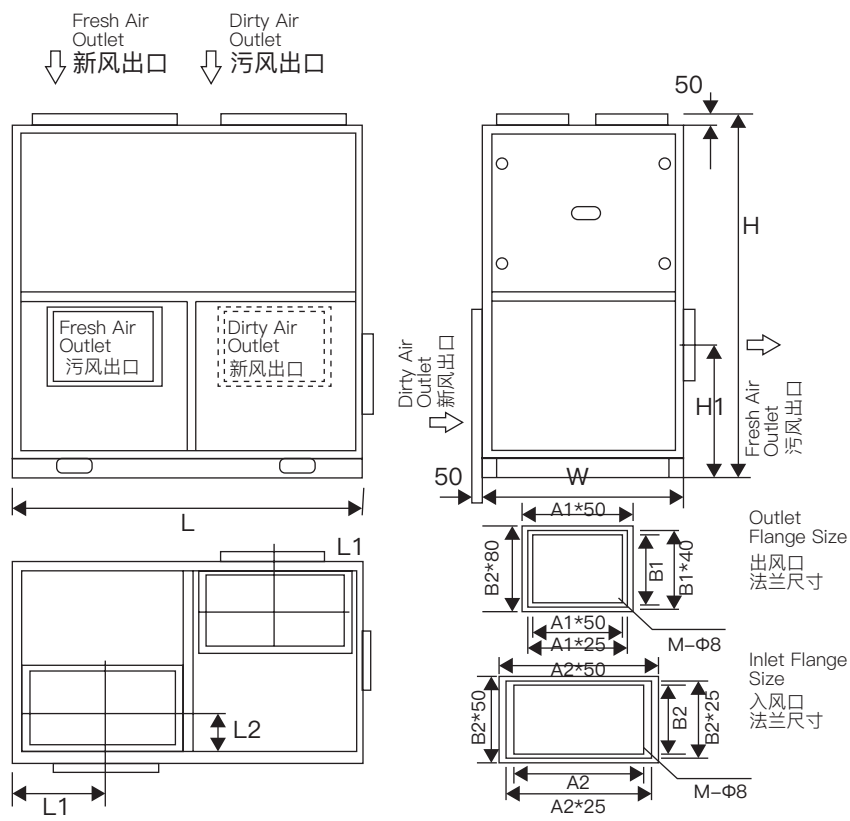

RNXHBQ-D15-D60 / RNXHBX-D15-D60

Model 型号	L	L1	L2	W	H	H1	A1	A2	B1	B2	M	N
RNXHBQ-D15/ RNXHBX-D15	1250	322.5	190	590	1220	427.5	320	350	250	250	10	10
RNXHBQ-D20/ RNXHBX-D20	1250	322.5	190	590	1220	427.5	320	350	250	250	10	10
RNXHBQ-D25/ RNXHBX-D25	1450	372.5	190	590	1295	510	400	450	250	250	10	10
RNXHBQ-D30/ RNXHBX-D30	1450	372.5	190	690	1359	510	400	450	250	250	10	10
RNXHBQ-D40/ RNXHBX-D40	1400	360	203	690	1540	575	400	490	320	275	12	12
RNXHBQ-D50/ RNXHBX-D50	1700	435	240	850	1770	648	500	600	350	350	16	14
RNXHBQ-D60/ RNXHBX-D60	1700	435	240	950	1770	648	500	600	350	350	16	14



Supplier: Olyvent (Oulairuina) Equipment Co., Ltd.

Office Address: Room 105-194, 1st Floor, No. 610-1, Gutai South Road, Hunnan District, Shenyang Area, China (Liaoning) Pilot Free Trade Zone, Shenyang City, Liaoning Province, China

Manufacturing Address: D6, Luquan Qianmu Industrial Park, Dezhou, Shandong, China

Contact Person: Leon Zhao

Tel / WeChat: (+86) 139 0400 7173

Tel: (+86) 0534-6398555

Email: leon@olyvent.com

Made-in-China: hvac-trust.en.made-in-china.com