



HOME FRESH AIR VENTILATION SYSTEM

家用新风换气系统



HOME FRESH AIR VENTILATION SYSTEM

家用新风换气系统

PRODUCT FEATURES

产品特点

The device is equipped with: primary filter + activated carbon filter + sub-high efficiency filter.

Suitable places: hotel rooms, medical inpatient departments; laboratories, equipment rooms; chess and card rooms, catering, KTV and other places.

Intelligently balance indoor temperature and humidity: advanced heat exchange system reduces indoor energy loss and reduces the load on air conditioners by more than 40%.

Real-time PM2.5 monitoring, indoor air quality at a glance.

设备内设：初效过滤 + 活性炭过滤 + 亚高效过滤。

适应场所：宾馆客房、医疗住院部；实验室、机房；棋牌室、餐饮、KTV 等场所。


智能平衡室内温湿度：先进的热交换系统，减少室内能量流失，为空调减少 40% 以上负荷。

实时 PM2.5 监控，室内空气质量一目了然。

PERFORMANCE PARAMETERS

性能参数


Model	Voltage (V)	Rated Power (W)			Air Volume (m³/h)			Static Pressure (Pa)	Heat Recovery Rate (Cooling) (%)			Heat Recovery Rate (Heating) (%)			Noise dB (A)			Weight (Kg)
		High	Med-ium	Low	High	Med-ium	Low	(Pa)	High	Med-ium	Low	High	Med-ium	Low	High	Med-ium	Low	
型号	电压 (V)	额定功率 (W)			风量 (m³/h)			静压	热回收率 (制冷时) (%)			热回收率 (制热时) (%)			噪音 dB (A)			重量 (Kg)
		高	中	低	高	中	低	(Pa)	高	中	低	高	中	低	高	中	低	
RNXJ1-015DT	220	120	100	80	155	120	100	100	66	68	70	70	72	73	39	30	27	48
RNXJ1-030DT	220	180	170	134	310	270	180	120	67	69	71	71	72	73	42	35	30	58
RNXJ1-040DT	220	360	276	220	400	360	250	150	68	69	71	71	72	73	50	45	40	68
RNXJ2-020DT	220	80	60	40	200	150	100	85	64	66	69	70	72	74	36	32	29	32
RNXJ2-030DT	220	80	60	40	300	225	150	85	65	67	70	70	71	73	38	36	32	42
RNXJ2-040DT	220	110	82	55	400	300	200	88	61	64	68	68	71	72	47	40	36	48
RNXJ2-050DT	220	110	82	55	500	375	250	98	62	63	69	66	68	71	48	42	38	58
RNXJ2-060DT	220	110	82	55	600	450	320	120	62	66	70	67	68	72	52	43	40	68
RNXJ2-080DT	220	240	180	120	800	600	420	132	63	67	72	66	69	73	55	50	45	72
RNXJ3-020DT	220	180	135	90	200	150	100	85	66	68	70	70	72	73	39	30	27	48

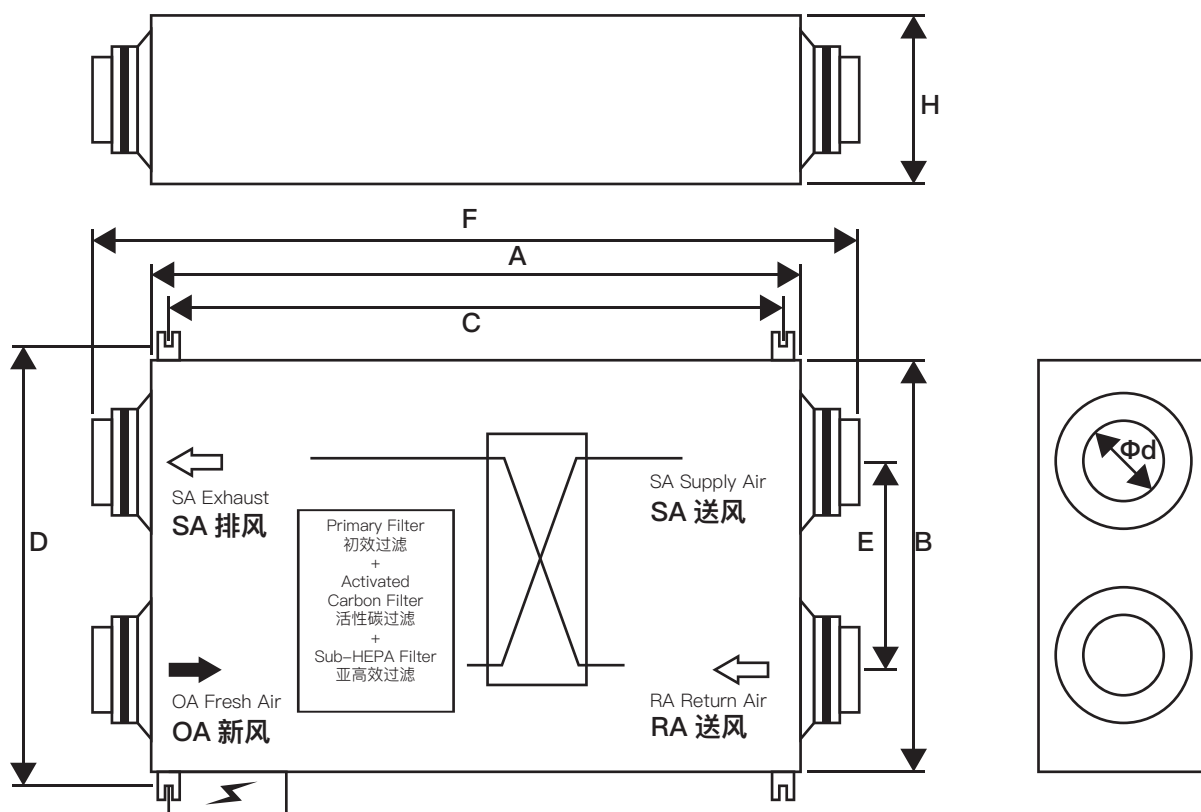

DIMENSION PARAMETERS

尺寸参数

Model 型号	A	B	C	D	E	F	H	Φd
	A	B	C	D	E	F	H	Φd
RNXJ1-015DT	938	628	860	728	360	1058	218	115
RNXJ1-030DT	938	628	860	728	360	1058	218	115
RNXJ1-040DT	938	628	860	728	380	1058	218	152
RNXJ2-020DT	800	670	840	630	350	940	210	108
RNXJ2-030DT	800	670	840	630	350	940	210	108
RNXJ2-040DT	800	720	840	680	375	940	245	145
RNXJ2-050DT	980	800	920	850	400	1120	320	195
RNXJ2-060DT	980	850	920	900	425	1120	320	195
RNXJ2-080DT	1100	900	1040	950	458	1240	410	195
RNXJ3-020DT	820	690	740	650	440	955	220	108
RNXJ3-030DT	820	690	740	650	440	955	220	108
RNXJ3-040DT	820	690	740	650	440	955	220	145
RNXJ3-050DT	980	820	900	860	480	1120	280	195



Supplier: Olyvent (Oulairuina) Equipment Co., Ltd.

Office Address: Room 105-194, 1st Floor, No. 610-1, Gutai South Road, Hunnan District, Shenyang Area, China (Liaoning) Pilot Free Trade Zone, Shenyang City, Liaoning Province, China

Manufacturing Address: D6, Luquan Qianmu Industrial Park, Dezhou, Shandong, China

Contact Person: Leon Zhao

Tel / WeChat: (+86) 139 0400 7173

Tel: (+86) 0534-6398555

Email: leon@olyvent.com

Made-in-China: hvac-trust.en.made-in-china.com